

GS-9800-MPS-POE




Box IP Camera Support POE Ethernet Power Supply

Features

- Optimized H.264 video compression algorithm to satisfy the transmission of High Definition video at low network bandwidth, saves storage space, supports Dual-stream.
- High Definition digital video, fully compatible supporting 1280x720
- Built-in Web Server to realize remote surveillance, control and setting via IE.
- Support remote software update function
- Bi-directional real time transmission of audio talk-back
- Provide video loss, motion detection and sensor alarm functions
- Provide RS485/RS232 serial port with several built-in high-speed domes and decoder protocols, supports transparent protocols.
- Support image masking, image capturing, SD card.
- Support POE ethernet power supply
- Auto-retrievey function and auto-connection if the network interrupts

Structure

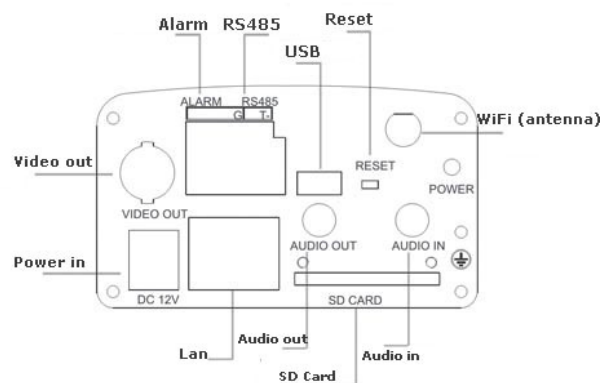

GS-9800-MPS-POE

Specs

Image Sensor	GSMPS-POE		0.5LUX, 1/3 SONY Super HAD CCD
Auto Iris Control	DC drive		
Video Compression	H.264 Baseline Profile @Level 2.2		
Video Definition	CCD	PAL:, HDTV 1280x720 resolution	
Video Parameters	Brightness, Hue, Contrast, Saturation, Image quality.		
Streaming Format	Optional Video Streaming or Audio & Video composite Streaming		
Video Frame Rate	CCD	PAL: 1-25frames/second NTSC:1-30frames/second	
	CMOS	1-30frames/second	
Video Compression Bit rate	16Kbit/S~4Mbit/S		
Audio Input	1channel, linear input, Input Impedance:1KOhms		
Audio Compression	G.726		
Audio Output	1channel, RCA interface, linear output,		
Audio two-way talk	Built-in Audio I/O port		
Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS, ARP, ICMP, POP3, NTP, IPsec, UPNP, RTP, RTCP		
System Interface	10M/100M self-adapting Ethernet port, 1 RS485 port, 1 RS232 port (supports transparent protocols)		
Alarm Input	1channel on/off input, supporting NO (normally open) or NC (normally close) sense.		
Alarm Output	1 channel on/off output, 120VAC 1A/24VDC 1A		
Input Power Supply	DC 12V, 1A		
Maximum Power	Less than 6W		
Operating Temperature	-10 ~ +55°C		
Storage Temperature	-20 ~ +70 °C		
Operating Humidity	10 ~ 85%		
System Requirements	Operation System: Microsoft Windows 2000/XP/2003 Vista & 7 Browser: Microsoft Internet Explorer 5.x or above		